43" Outdoor Battery A-Sign
Model: PF43HL3

REDDIE™
TECHNOLOGY READY

Fully Portable

Thanks to the lightweight enclosure, rugged castors and sturdy non-foldable design this innovative display can be easily moved around by one person.

Secure Locking Bar

Once in position the rugged castors can be locked in place with the built in locking bar. For additional security a padlock can be used to lock this in place.

- IP65 Rated Enclosure
- 14 Hour Running Time
- Android Media Player
- Network Upgrade
- Wide Viewing Angle
- Tempered Glass Front
- Locking Bar
- Power Timer
- Free Scheduling Software
- White Version Available

Other Features

IP65 Rated Weatherproof Enclosure

The outer casing has an IP65 rating which means it keeps out all airborne swarf, dust and other particles as well as being protected from any wet weather conditions; broadening the range of possible environments.
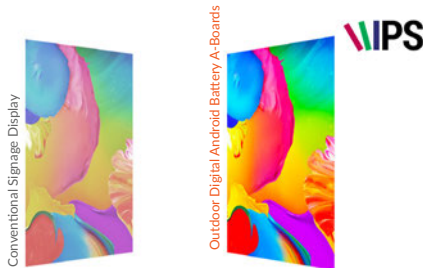
Protection from the weather!

Battery Powered Display

The integrated lithium-polymer battery revolutionises the way you can use digital signage. This commercial grade slimline battery solution gives you over 14 hours running time.

14 Hours

700cd/m² IPS Panel

The high brightness LCD panel used in this display is up to three times brighter than a domestic TV making it ideal for outdoor spaces.

Conventional Signage Display

Outdoor Digital Android Battery A-Boards

\\IPS

Plug and Play

Plug and Play is the most straightforward way to upload content to the screen. Simply load images and videos on a USB stick, insert in the display, wait for your content to copy over and then remove. Your images and videos will now play in a continuous loop.

USB

Stylish Robust Enclosure

These displays feature a tempered glass front for panel protection and a moulded polymer rear for improved portability. The display, support and castors are fixed unlike more traditional A-Boards for supreme durability.
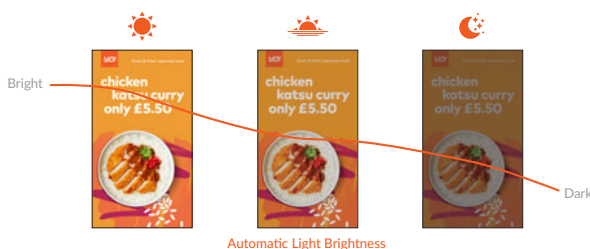
Charge Level Indicator

This handy indication meter tells you exactly how much charge you have left in your battery for ultimate convenience.

97%
13:50 Remaining

Ambient Light Sensor

The display has a light sensor that changes the screen's brightness depending on the ambient light ensuring the most suitable brightness depending on the environment.

Bright

Dark

Automatic Light Brightness

White Version Available

As well as the classic piano black model you can also order a modern and stylish white version if required.

700CD/M² IPS PANEL

TEMPERED GLASS FRONT

INTEGRATED ANDROID MEDIA PLAYER

OPTIONAL NETWORK UPGRADE

ROBUST ENCLOSURE

AMBIENT LIGHT SENSOR

PLUG AND PLAY

LOCKABLE RUGGED CASTORS

700cd/m²

HIGH BRIGHTNESS

14 Hrs

BATTERY POWERED

WEATHERPROOF IP65 RATED ENCLOSURE

AMBIENT LIGHT SENSOR

Specification Table

		43 Inch
Panel	Resolution	1920x1080
	Display Area (mm)	531.4x943.2
	Aspect Ratio	16:9
	Brightness (cd/m²)	700
	Colour	16.7M
	Viewing Angle	178°
	Contrast Ratio	5000:1
Audio	Speaker Type	5W, 8Ω (x2)
Battery	Battery Technology	Integrated lithium polymer
	Charging Time	7 hours
	Battery Life	14 hours
	Battery Capacity	44000mAh
	Power Supply	29.4V - 21V
	Power Consumption	126W
	Energy	1108.8 Watt-hours
Mechanical	Unit Size (WxHxD mm)	1232x604.7x478
	Package Size (WxHxD mm)	1310x745x645
	Footprint (WxH mm)	604.7x478
	Net Weight (kg)	37.5
	Gross Weight (kg)	43
Environmental	Operating Temperature	0 °C to 50 °C
	Storage Temperature	-30°C to 60°C
	Operating Humidity	10% to 80%
	Storage Humidity	5% to 95%
Computer	Media Formats	Video (MPG, AVI, MP4, RM, RMVB, TS), Audio (MP3, WMA), Image (JPG, GIF, BMP, PNG)
	Media Resolution	1920x1080/1080x1920
	Internal Memory	6GB
	CPU	Quad-Core Cortex-A17@1.61GHz
	GPU	Mali-T760 MP4 @600MHz
	RAM	2GB DDR3
	ROM	8GB NAND
	USB	USB2.0 HOST (x2)
	LAN	10/100M Ethernet (Network Version Only)
	Wi-Fi	802.11b/g/n/ac (Network Version Only)
	OS	Android 5.1.1
	Graphic Engine	OpenGL ES 1.1/2.0/3.0/3.1, OpenCL 1.1, Renderscript, Direct3D 11.1
Accessories	Included	Scheduling Software, Remote Control, User Manual, Charger, Mains Power Cable
	Optional	Network Upgrade, Security Chain
Warranty	Warranty Period	3 Year Warranty
	Warranty Period (Battery)	3 Year Warranty*
	Technical Support	Lifetime

Errors and omissions excepted

*Excludes degradation and user damaged caused by sulphation, deep cycling and overcharging.

604.7

531.4

943.2

1194.9

1232

POWER SWITCH
USB
USB
POWER CABLE

478.0